

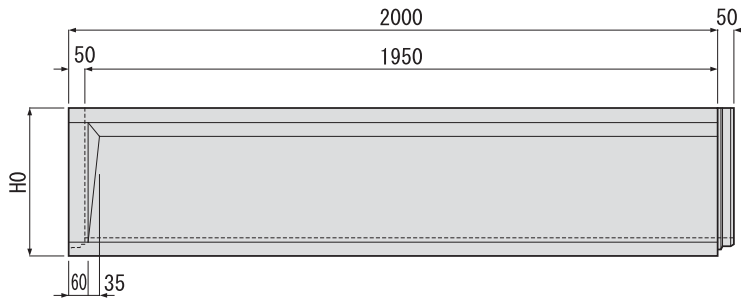



U型水路 II型

■設計条件：上載荷重 5kN/m²

製品間は、漏水防止のシーリング材を使用し接続を行います。



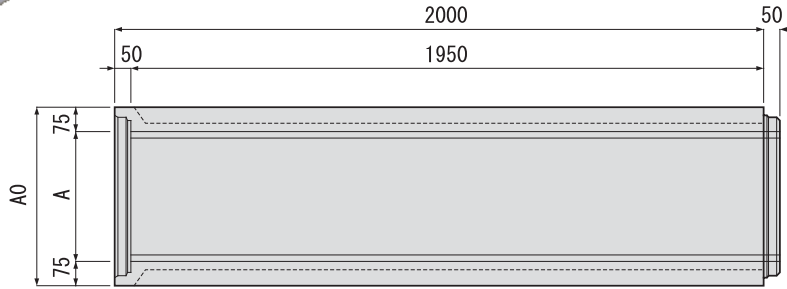


単位 (mm)

呼び名	寸 法								参考重量 (kg)
	A	B	H	A0	H0	T	R		
300	300	260	300	450	356	56	50	215	
400	400	360	400	550	456	56	50	315	
500	500	460	500	650	565	65	60	415	
600	600	560	600	750	665	65	60	544	

U型水路 II型蓋

■設計条件：輪荷重 T-4

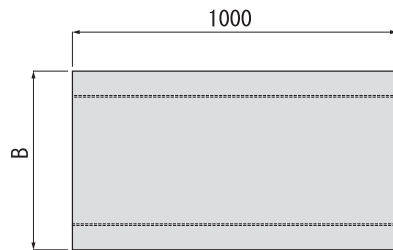

単位 (mm)

呼び名	寸 法			参考重量 (kg)
	T	B1	B	
300	65	290	450	77
400	75	390	550	111
500	85	490	650	149
600	95	590	750	192